

tifermec®



**BÖSCHUNGSMÄHER
DESBROZADORAS**

**DÉBROUSSAILLEUSE
FLAIL-HEDGER MOWERS**

DECESPUGLIATRICI

- serie Geo - Geo Vision -

IL FUTURO È IL NOSTRO LAVORO

Decespugliatrici • Flail-hedger mowers • Böschungsmäher • Débroussailleuse • Desbrozadoras

serie Geo • L •


STANDARD




- D ISTRIBUTORE CON LEVA DI ANTINVERSIONE
- DISTRIBUTOR WITH REVERSAL PREVENTION LEVER
- VERTEILER MIT UMKEHRUNGSVERHINDERNDEN HEBEL
- DISTRIBUTEUR AVEC LEVIER ANTINVERSION
- DISTRIBUIDOR CON PALANCA DE ANTINVERSION



- MOTORE IN GHISA
- CAST-IRON ENGINE
- MOTOR AUS GUSSEISEN
- MOTEUR EN FONTE
- MOTOR EN HIERRO FUNDIDO



- FUNZIONAMENTO DELLA TESTATA BIDIREZIONALE
- TWO-WAY HEAD OPERATION
- FUNKTION IN ZWEI RICHTUNGEN DES MULCHKOPFES
- FONCTIONNEMENT DE LA TÊTE À DEUX DIRECTIONS
- FUNCIONAMIENTO BIDIRECCIONAL DEL CABEZAL TRITURADOR



- SISTEMA FLOTTANTE DI AUTOLIVELLAMENTO AL TERRENO
- FLOATING GROUND SELF-LEVELLING SYSTEM
- SCHWIMMSTELLUNG, BODENANPASSUNG DES MÄHKOPFES
- SYSTÈME FLOTTANT D'AUTO-NIVELLEMENT PAR RAPPORT AU TERRAIN
- SISTEMA FLOTANTE DE AUTONIVELACIÓN AL TERRENO



CS (standard)



OPTIONALS



MS




CU

Mod. L - P - PS


DATI TECNICI / SPECIFICATIONS TECHNISCHE DATEN / CARACTÉRISTIQUES / DATOS TÉCNICOS

MOVIMENTAZIONE BRACCI / ARM MOTION BEWEGUNG ARME / MOUVEMENT DES BRAS / MOVIMIENTO BRAZOS		G 455 L	G 505 L
A	(mm.)	1900	1900
B	(mm.)	4500	5000
C	(mm.)	2400	2600
D	(mm.)	4300	4800
E	(mm.)	2400	2900
F	(mm.)	1400	1480
G	(mm.)	800-1000	800-1000
Peso Standard Weight - Gewicht	(kg.)	700	780
Potenza minima Min. power requirements - Mindestleistung	(HP)	50	55
Peso minimo Min. weight - Mindestgewicht	(kg.)	2500	2800
Velocità presa di forza Pto speed - Zapfwellendrehzahl	(RPM)	540	

OPTIONAL

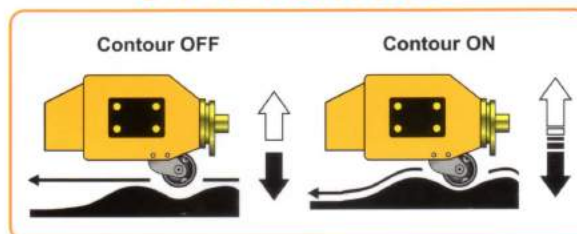

Decespugliatrici • Flail-hedger mowers • Böschungsmäher • Débroussailleuse • Desbrozadoras
serie Geo • P • PS •

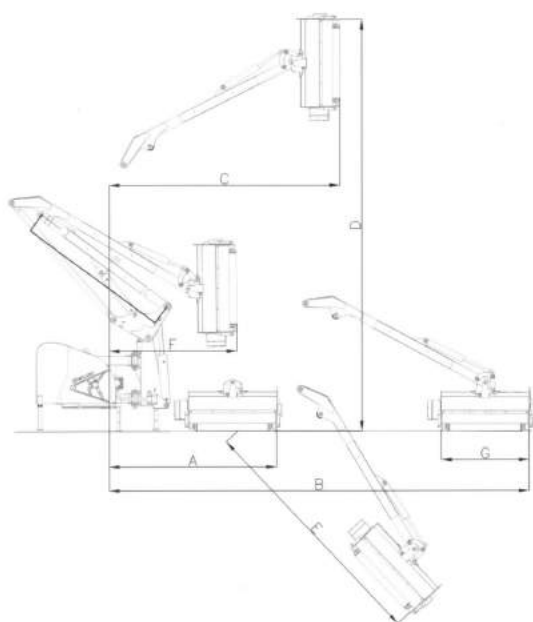

Mod. PS

OPTIONALS



MF



MP

Mod. P - PS


OPTIONALS

- TRASMISSIONE A CINGHIA
- ENTRAINEMENT PAR COURROIES
- BELT DRIVE
- RIEMENANTRIEB
- TRANSMISSION POR CORREAS



Mod. P - PS

STANDARD

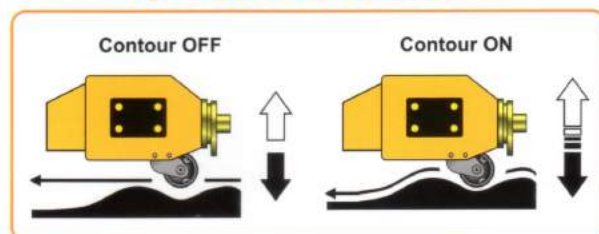

DATI TECNICI / SPECIFICATIONS TECHNISCHE DATEN / CARACTÉRISTIQUES / DATOS TÉCNICOS							
MOVIMENTAZIONE BRACCI / ARM MOTION BEWEGUNG ARME / MOUVEMENT DES BRAS / MOVIMIENTO BRAZOS				G 555 P	G 635 PS	G 655 P	G 735 PS
A	(mm.)	A	(mm.)	2000	2000	2000	2000
B	(mm.)	B	(mm.)	5500	5500-6300	6500	6500-7300
C	(mm.)	C	(mm.)	2800	2800-3400	3500	3500
D	(mm.)	D	(mm.)	5600	5600-6200	6100	6100-6700
E	(mm.)	E	(mm.)	4100	4100-4700	4500	4500-5100
F	(mm.)	F	(mm.)	1800	1800	1900	1900
G	(mm.)	G	(mm.)	1000-1300	1000-1300	1000-1300	1000-1300
Peso Standard Weight - Gewicht	(kg.)	Poids Peso	(kg.)	1140	1300	1240	1350
Potenza minima Min. power requirement - Mindestleistung	(HP)	Puissance min. requise Potencia mínima	(HP)	80	90	90	110
Peso minimo Min. weight - Mindestgewicht	(kg.)	Poids min. Peso mínimo	(kg.)	3200	3500	3500	4000
Velocità presa di forza Pto speed - Zashvelendrehzahl	(RPM)	Vitesse Pdf Velocidad toma de fuerza	(RPM)	540			

Decespugliatrici • Flail-hedger mowers • Böschungsmäher • Débroussailleuse • Desbrozadoras serie **Geo Vision** • L • P •



OPTIONALS



- KIT TENDITORI DI FISSAGGIO
- ALBERO CARDANICO
- TRACTOR STABILIZERS
- P.T.O. DRIVE SHAFTS
- SPANNHALTER ZUM SCHLEPPER
- GELENKWELLEN
- TENDEURS RÉGLABLE
- CARDAN
- KIT TENSORES DE FIJACIÓN
- ÁRBOL CARDAN



- SUPPORTO TERZO PUNTO
- SUPPORT STRETCHERS
- TRÄGER SPANNVORRICHTUNG
- SUPPORT TENDEURS
- SOPORTE TIRANTES



- COMANDO ELETTRIDRAULICO
CON JOYSTICK
- ELECTRIC CONTROL JOYSTICK
- ELEKTROHYDRAULISCHE
STEUERUNG MIT JOYSTICK
- COMMANDE ELECTROHYDRAULIQUE
MONO-LEVIER
- MANDO ELECTRO-HIDRÁULICO
CON «JOYSTICK»



- COMANDO ELETTROPROPORZIONALE
CON JOYSTICK
- PROPORTIONAL ELECTRIC
CONTROL WITH JOYSTICK
- COMMANDE ÉLECTRIQUE
PROPORTIONNELLE MONO-LEVIER
- ELEKTROPROPORTIONALER SELTZUG
- MANDOS
ELECTROPROPORCIONALES



- SCAMBIATORE DI CALORE
- HEAT EXCHANGER
- WÄRMEAUSTAUSCHER
- ÉCHANGEUR DE CHALEUR
- REFRIGERADOR



DATI TECNICI / SPECIFICATIONS TECHNISCHE DATEN / CARACTÉRISTIQUES / DATOS TÉCNICOS

MOVIMENTAZIONE BRACCI / ARM MOTION BEWEGUNG ARME / MOUVEMENT DES BRAS / MOVIMIENTO BRAZOS				GV 455 L	GV 505 L	GV 550 P	GV 600 P	GV 650 P
A	(mm.)	A	(mm.)	1900	1900	2000	2000	2000
B	(mm.)	B	(mm.)	4500	5000	5500	6000	6500
C	(mm.)	C	(mm.)	2300	2600	3000	3200	3500
D	(mm.)	D	(mm.)	4400	4800	5600	5800	6100
E	(mm.)	E	(mm.)	2400	2900	4100	4300	4500
F	(mm.)	F	(mm.)	1480	1480	1800	1800	1900
G	(mm.)	G	(mm.)	800-1000	800-1000	1000-1300	1000-1300	1000-1300
N	(mm.)	N	(mm.)	1640	1840	2200	2200	2500
Peso Standard Weight - Gewicht	(kg.)	Poids Peso	(kg.)	840	930	1300	1350	1400
Potenza minima Min. power requirements - Mindestleistung	(HP)	Puissance min. requise Potencia mínima	(HP)	70	70	80	100	100
Peso minimo Min. weight - Mindestgewicht	(kg.)	Poids min. Peso minimo	(kg.)	3000	3200	3500	4000	4500
Velocità presa di forza Pto speed - Zapfwellendrehzahl	(RPM)	Vitesse Pdt Velocidad toma de fuerza	(RPM)	540				

EQUIPMENTS





tifermec[®]
Oleodinamica

Via C. Marx, 2/A - 06012 CERBARA di Città di Castello - Perugia - Italy
Tel. +39 075 8510376 Fax +39 075 8510318
www.tifermec.com - e-mail: tifermec@tifermec.com

